

EX6~10K Series




EX6~10KVA series high frequency online UPS is specially designed for servers, datacenter critical network devices, sensitive electronic equipment, telecom, bank, hospital, bureau, traffic, public security, ATM and so on.


Features:

- ◆ Large Blue Ground LCD digital display shows Real time detailed status and parameters.
- ◆ Output Voltage, Frequency parameter can be set on the display.
- ◆ Advanced DSP technology, ensure long life reliability.
- ◆ Wide input voltage range, zero transfer time.
- ◆ True online double conversion technology.
- ◆ N+X parallel redundancy.
- ◆ Excellent protection against over voltage, over Load, over current, over charge and so on.
- ◆ Input L and N Lines reverse wiring detection, Auto start when AC back.
- ◆ DC start function, input PFC reverses function.
- ◆ Auto bypass output.
- ◆ RS232 intelligent communication monitoring.
- ◆ AS-400 Dry contact and SNMP card remote intelligent control.
- ◆ Available to work with generators.
- ◆ Lightning, surge, short circuit, protection.

Application:

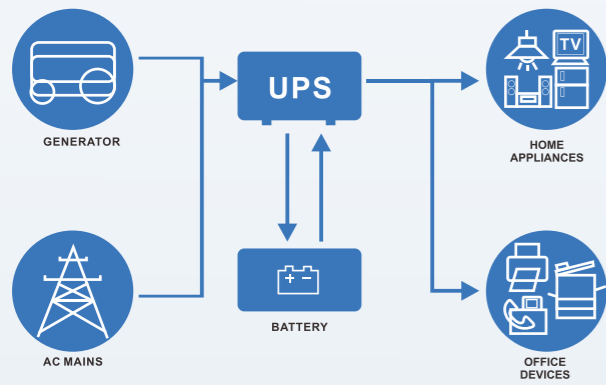

Home Office Farm Industrial



sinewave output AC charger LCD/LED display

Specifications

High Frequency Online UPS

Model		EX6K	EX10K	EX6KL	EX10KL	
Capacity	VA/W	6000VA/4800W	10000VA/8000W	6000VA/4800W	10000VA/8000W	
Input	Nominal Voltage	200/208/220/230/240VAC				
	Voltage Range	120~275VAC				
	Frequency Range	50Hz/60Hz(Adjustable); 50Hz:46 ~ 54Hz; 60Hz:56 ~ 64Hz				
	Phase	Single phase with Ground				
	Power Factor	≥0.97				
Output	Voltage	200/208/220/230/240*(1±1%) VAC				
	Frequency	50/60Hz (Adjustable); 50Hz AC Mode: Follow AC Mode (AC Range 46~54Hz); Battery Mode: 50Hz (1±0.2%); 60Hz AC Mode: Follow AC Mode (AC Range 56~64Hz); Battery Mode: 60Hz (1±0.2%);				
	Wave Form	Pure sine wave				
	Power Factor	0.8				
	Harmonic Distortion	≤2% THD (Linear load), ≤6% THD (Nonlinear load)				
	Overload Capacity	110%~150% maintain 30s then turn to bypass output, over 150% maintain 200ms				
	Current Crest Ratio	3:1				
	Connections	Terminal block				
	Efficiency	Battery Mode	87%			
		AC Mode	88%			
Battery	Type	Sealed free maintenance lead acid battery				
	Nominal DC voltage	Built in batteries 12V7AH		192VDC	192VDC	
	Quantity	16pcs	16pcs	16pcs	16pcs	
	Back-up Time (Full Load)	> 4min	> 3min	Depends on requested Back-up time		
	Recharge Time	7 hours to 90%	7 hours to 90%	Depends on the capacity of external battery bank		
	Charge Current (MAX)	1A	1A	4.5 A	4.5 A	
	Charge Voltage	219.5VDC±1%V				
	Bypass	Automatic Transfer	On overload and UPS failure			
Transfer Time		Zero				
Indicators	LCD Display	UPS status, I/P & O/P voltage & frequency, Battery voltage, Battery capacity, Loading, Fault code				
Audible Alarm		Bypass, On battery mode, Battery low, Overload, Fault				
Acoustic Noise	At 1 Meter Distance	<55dB				
	Communications	Intelligent RS232 serial port	Windows 98/NT/2000/XP/3000, Linux, Sun network, IBM Aix, Compaq True64 SGI IRIX, FreeBSD, HP-UX, MAC			
		SNMP (Optional)	Power management from SNMP manager and web browser			
	USB (Optional)	Windows family software and Mac OS				
Environmental	Operating Temperature	0~40℃				
	Operating Humidity	20-90% (No condensation)				
Weight	Net Weight (kgs)	59	60.5	20	21.5	
UPS Dimension	L*W*H (mm)	500*248*616	500*248*616	500*240*490	500*240*490	

◆ Product specifications are subject to change without further notice.